

Environmental Specifications

Operating Temperature
0°C~60°C


Storage Temperature
-10°C~70°C

Relative Humidity
0%~90% non-condensing

What's Included

FE1121-TX (3G-SDI Fiber Optic Extender Transmitter)
FE1121-RX (3G-SDI Fiber Optic Extender Receiver)
2pcs 5V Special Power Adapters
2pcs USB Cables
2pcs Mounting Brackets
Technical Specifications

Mounting Diagram

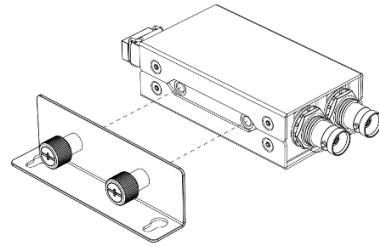

✧ Note: due to constant effort to improve products and product features, specifications may change without notice.